

Incoming supply: 400/230 V AC, 3/N/PE, 50 Hz

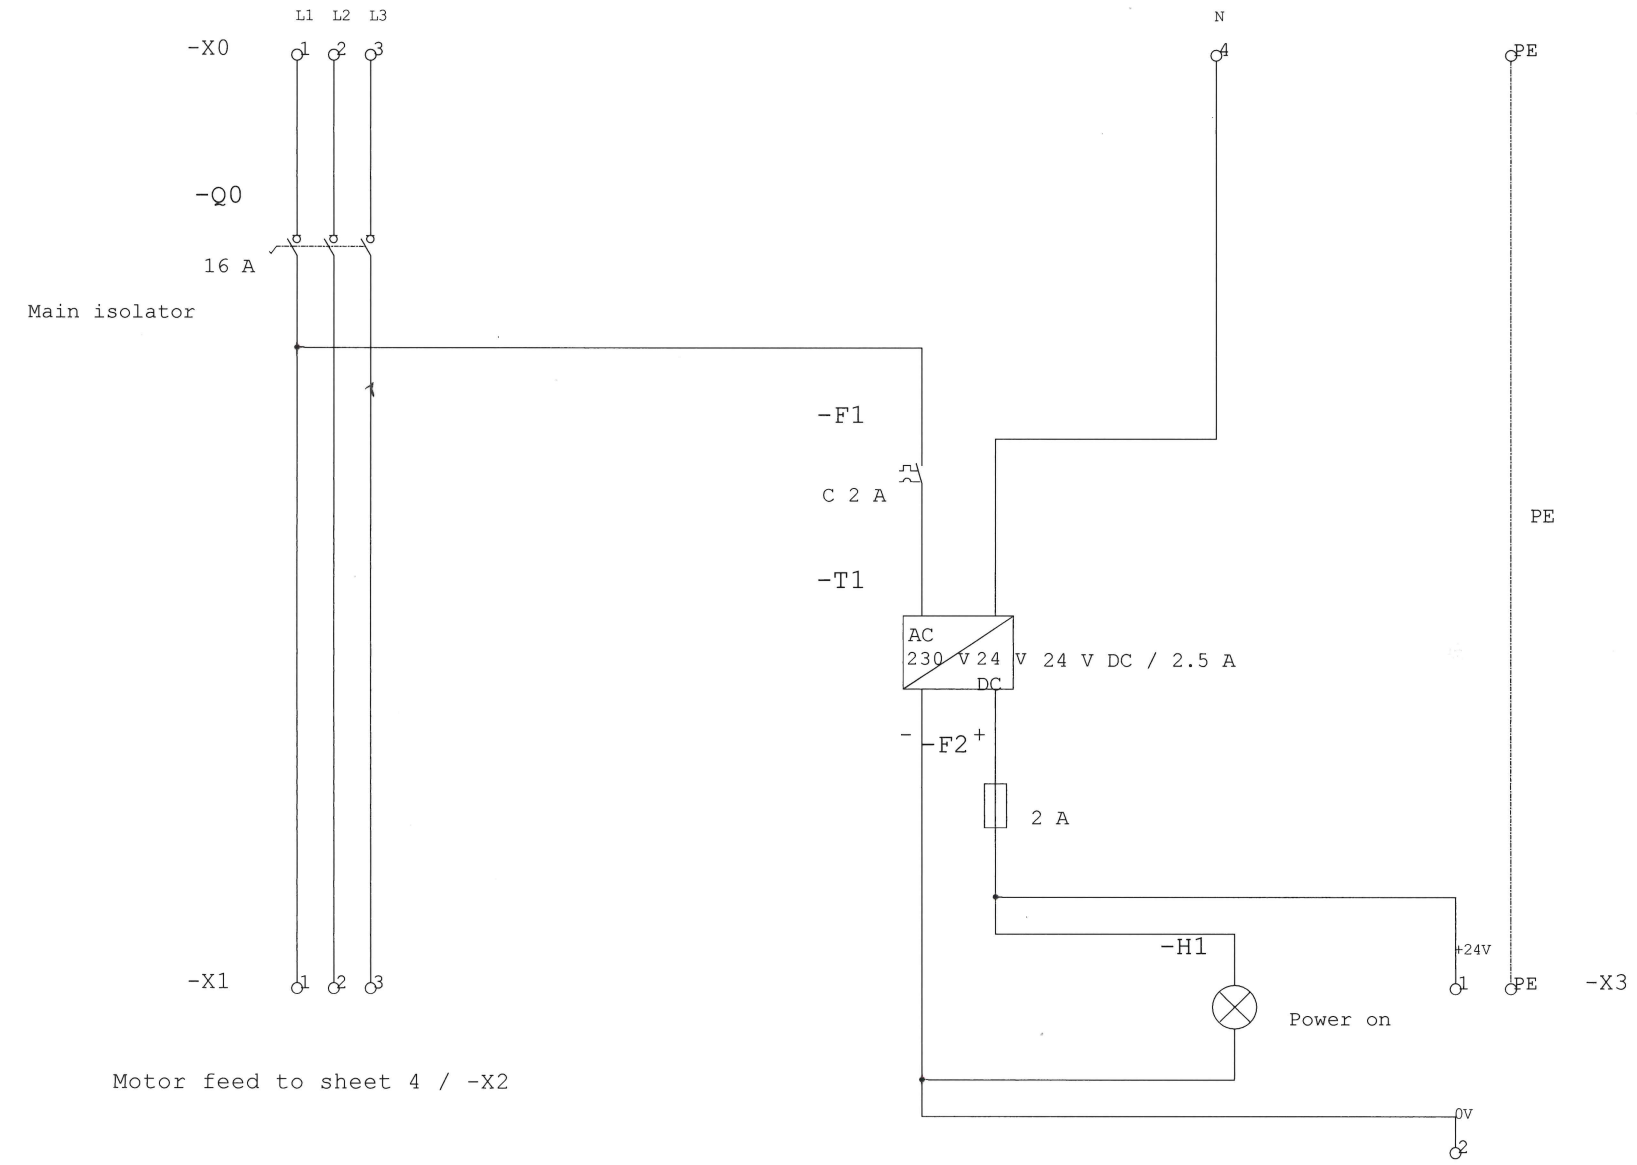


| | | | |
|---|---|---|---|
| | Author: Victor | AC and DC power distribution | Project: Test1 |
| | Date: 26.10.2026 | Revision 1.2 | Folio: 3/5 |

From sheet 3: -X1:1 / 2 / 3 / PE

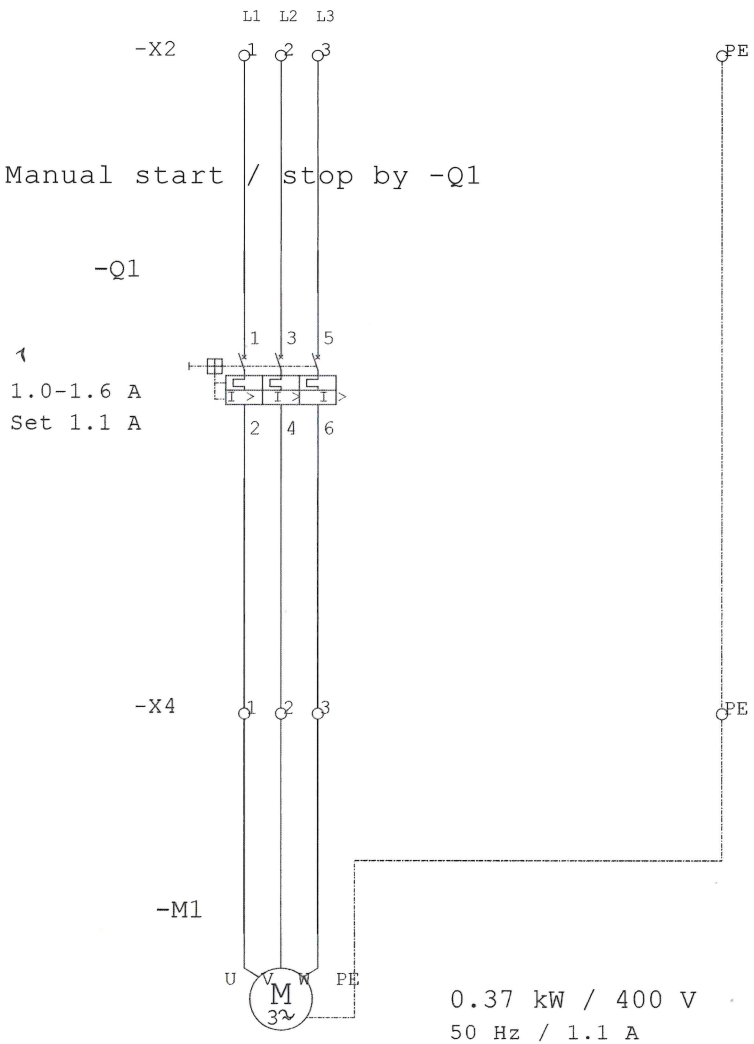



0.37 kW / 400 V
50 Hz / 1.1 A

Three-phase motor

24 V DC auxiliary indicators

From sheet 3: X3:1 (+24V), X3:2 (0V)

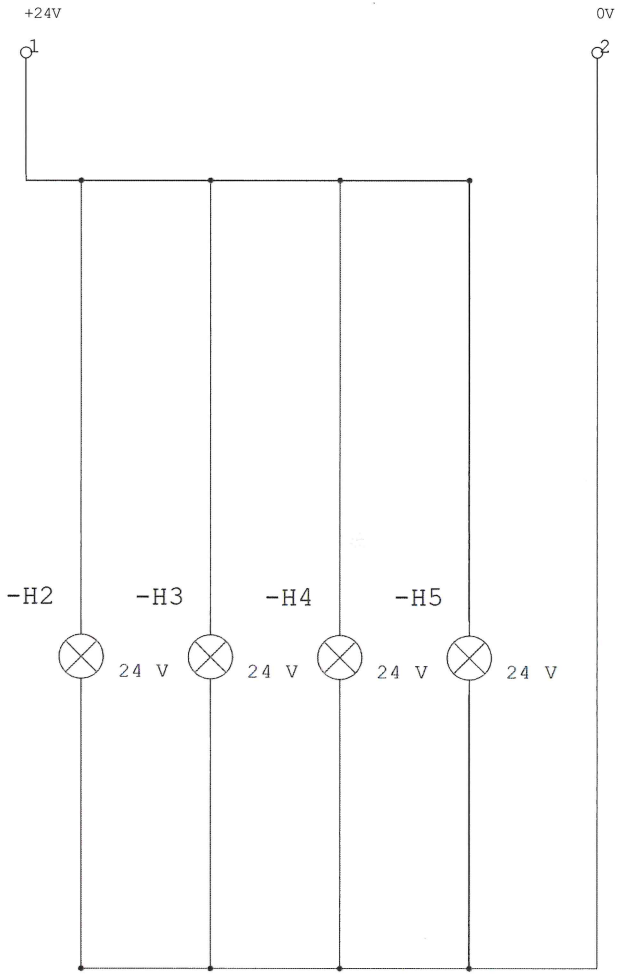


Conductors: 0.50 / black (identical settings)

| | | | |
|---|---|---|---|
| | Author: Victor | Three-phase motor | Project: Test1 |
| | Date: 26.10.2026 | Revision 1.2 | Folio: 4/5 |