



	0	1	2	3	4	5	6	7	8	9	
A	Test1 Electrical diagram										A
B	Manufacturer:XYZ										B
C	Project:Three-phase motor and 24 V DC supply										C
D	Drawing number:TEST1-001 Revision:1.4										D
E	Technical details Rated current:6 A Operating voltage:400 / 230 V AC Supply system:3 phases + N + PE Auxiliary voltage:24 V DC Frequency:50 Hz										E
F											F
G		Author: Victor			Cover sheet				Project: Test1		G
		Date: 26/10/2026			Revision 1.4				Folio: 1/6		
	0	1	2	3	4	5	6	7	8	9	

	0	1	2	3	4	5	6	7	8	9		
A											A	
B											B	
C											C	
D											D	
E											E	
F											F	
G											G	
		Author: Victor			Summary				Project: Test1			
		Date: 26/10/2026			Revision 1.4				Folio: 2/6			
	0	1	2	3	4	5	6	7	8	9		

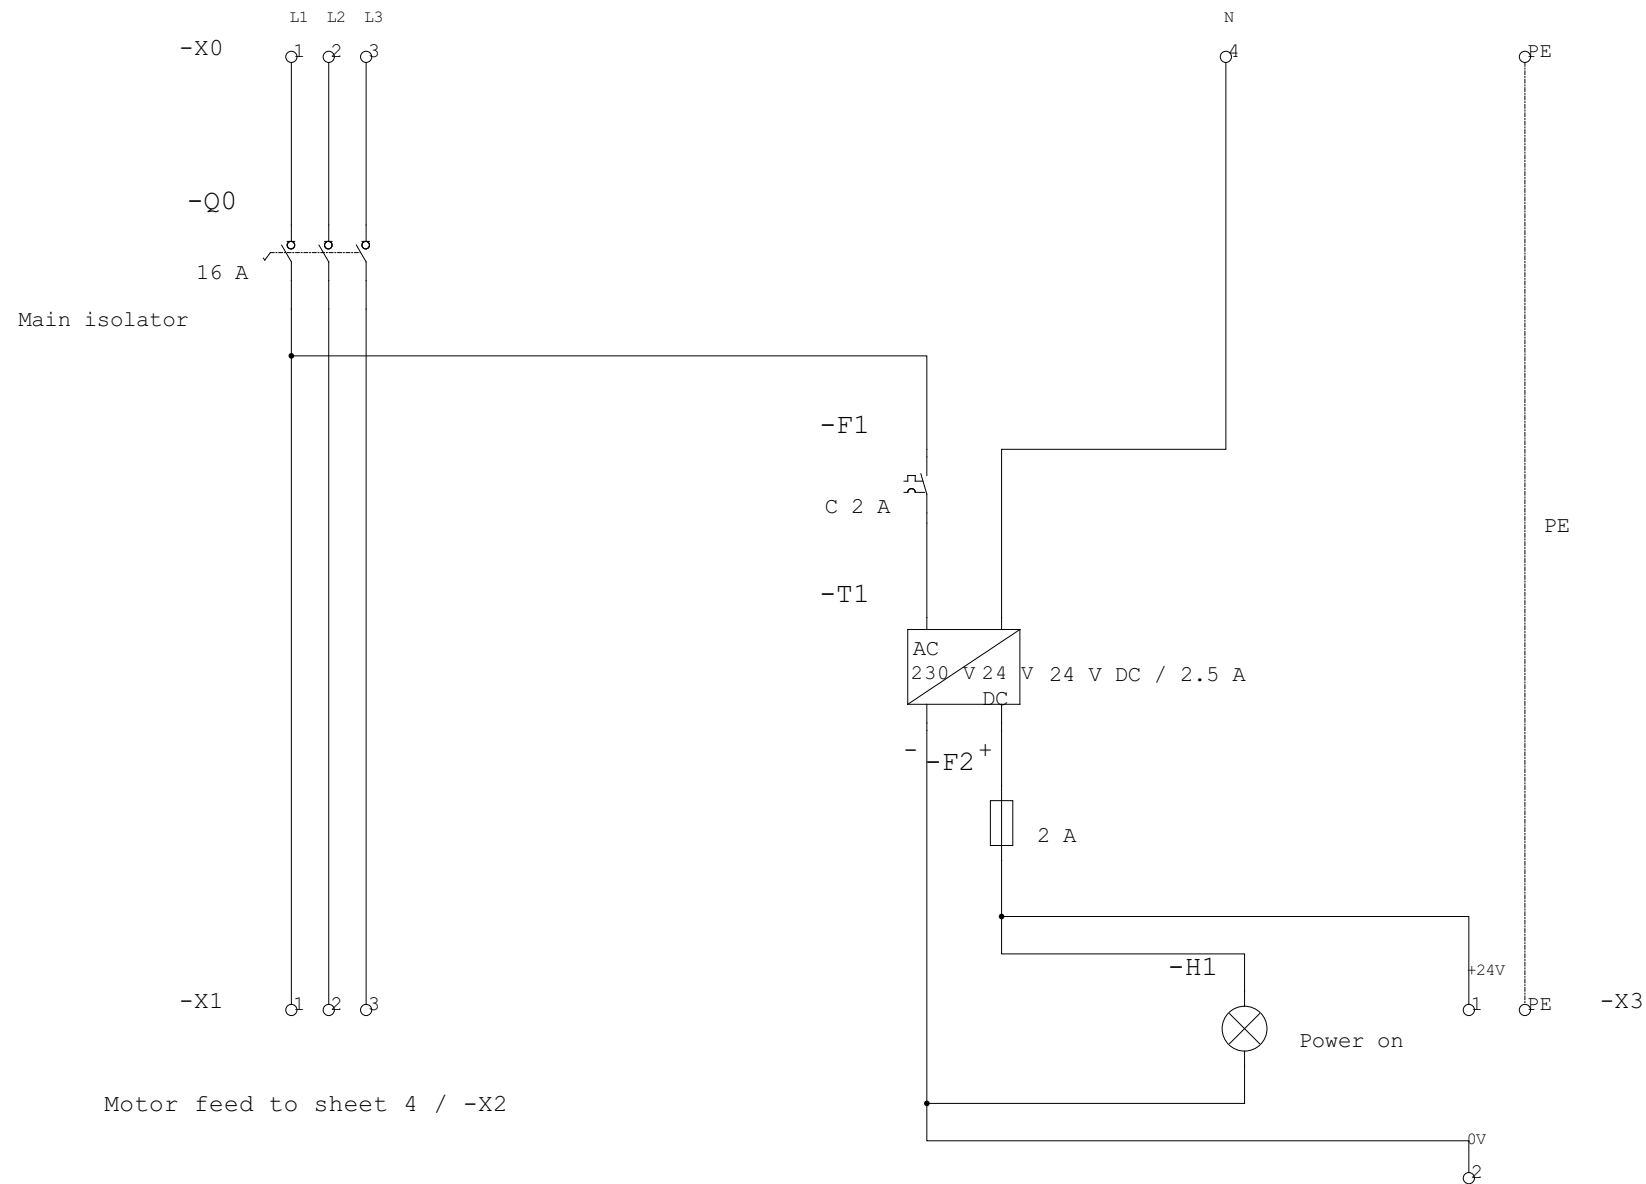

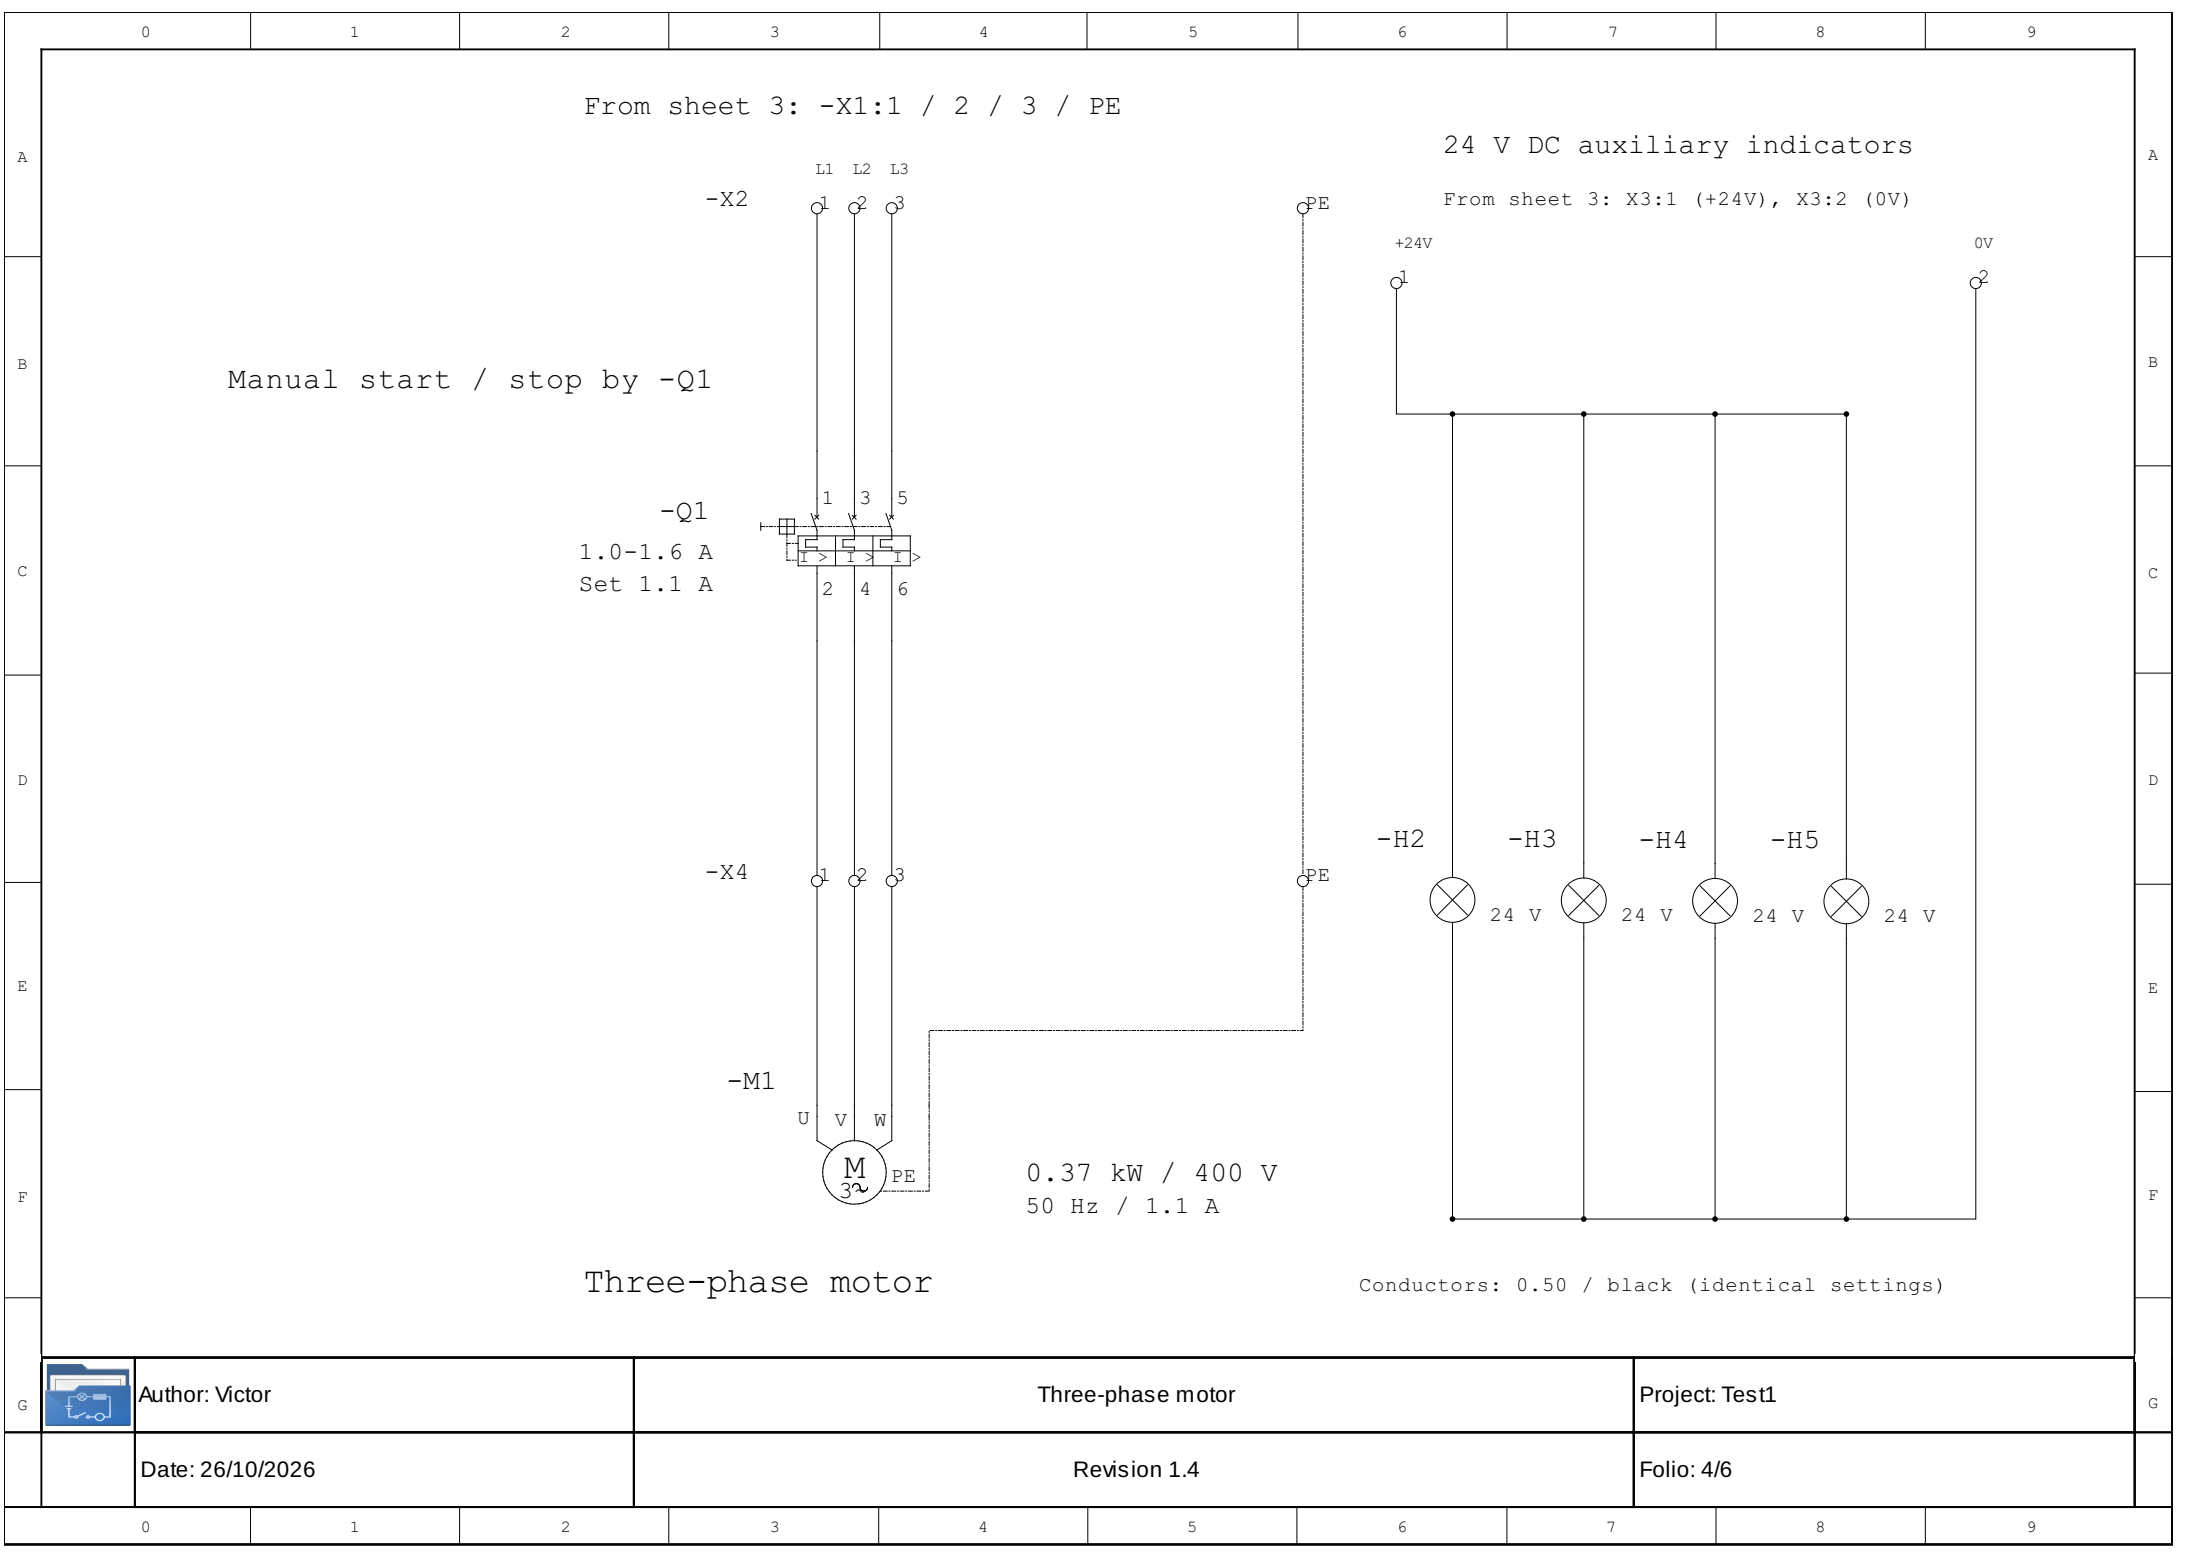

	0	1	2	3	4	5	6	7	8	9			
A											A		
B	No.	Qty				Article number		References		Manufacturer			
	1	1	Circuit-breaker, 1-pole, C2 A			A9F74102		F1		Schneider Electric			
	2	1	Fast-acting DC fuse, 2 A, 10 x 38 mm			KLKD002		F2		Littelfuse			
	3	1	Fuse holder, 1-pole, 10 x 38 mm			L60030M-1SQ		F2 (holder)		Littelfuse			
	4	5	Green LED pilot light, 24 V AC/DC			XB5AVB3		H1,H2,H3,H4,H5		Schneider Electric			
	5	1	Main isolator, 3-pole, 16 A			1SCA104811R1001		Q0		ABB			
	6	1	Motor-protective switch, 1.0-1.6 A			072735		Q1		Eaton			
	7	1	Power supply, 230 V AC / 24 V DC, 2.5 A			HDR-60-24		T1		MEAN WELL			
C	8	1	Three-phase motor, 0.37 kW, 400 V, 50 Hz			3GBA072410-ASD		M1		ABB			
											D		
	E											E	
	F											F	
G		Author: Victor			Material list				Project: Test1				G
		Date: 26/10/2026			Revision 1.4				Folio: 5/6				
	0	1	2	3	4	5	6	7	8	9			

	0	1	2	3	4	5	6	7	8	9		
A											A	
B		No.	Qty	Name		Article number		References		Manufacturer		
		1	1	Circuit-breaker, 1-pole, C2 A		A9F74102		F1		Schneider Electric		
		2	1	Fast-acting DC fuse, 2 A, 10 x 38 mm		KLKD002		F2		Littelfuse		
		3	1	Fuse holder, 1-pole, 10 x 38 mm		L60030M-1SQ		F2 (holder)		Littelfuse		
		4	5	Green LED pilot light, 24 V AC/DC		XB5AVB3		H1,H2,H3,H4,H5		Schneider Electric		
		5	1	Main isolator, 3-pole, 16 A		1SCA104811R1001		Q0		ABB		
		6	1	Motor-protective switch, 1.0-1.6 A		072735		Q1		Eaton		
		7	1	Power supply, 230 V AC / 24 V DC, 2.5 A		HDR-60-24		T1		MEAN WELL		
	8	1	Three-phase motor, 0.37 kW, 400 V, 50 Hz		3GBA072410-ASD		M1		ABB			
C											C	
D		Quantity	Textual description		Article number		Label		Manufacturer			
		1	Circuit-breaker, 1-pole, C2 A		A9F74102		-F1		Schneider Electric			
		1	Fast-acting DC fuse, 2 A, 10 x 38 mm		KLKD002		-F2		Littelfuse			
		1	Green LED pilot light, 24 V AC/DC		XB5AVB3		-H1		Schneider Electric			
		1	Green LED pilot light, 24 V AC/DC		XB5AVB3		-H2		Schneider Electric			
		1	Green LED pilot light, 24 V AC/DC		XB5AVB3		-H3		Schneider Electric			
		1	Green LED pilot light, 24 V AC/DC		XB5AVB3		-H4		Schneider Electric			
		1	Green LED pilot light, 24 V AC/DC		XB5AVB3		-H5		Schneider Electric			
E		1	Main isolator, 3-pole, 16 A		1SCA104811R1001		-Q0		ABB			
		1	Motor-protective switch, 1.0-1.6 A		072735		-Q1		Eaton			
		1	Power supply, 230 V AC / 24 V DC, 2.5 A		HDR-60-24		-T1		MEAN WELL			
		1	Three-phase motor, 0.37 kW, 400 V, 50 Hz		3GBA072410-ASD		-M1		ABB			
F											F	
G		Author: Victor		Material list 2					Project: Test1			G
		Date: 26/10/2026		Revision 1.4					Folio: 6/6			
	0	1	2	3	4	5	6	7	8	9		